


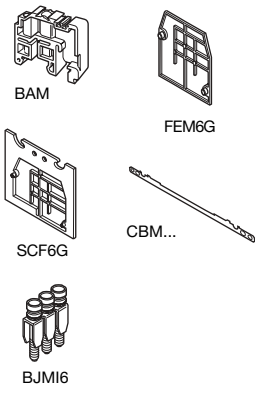


Feed through terminal blocks

Screw clamp to quick-connect  DIN 1-3

M 4/6.2G - 4 mm² blocks - 6 mm .236" spacing



Characteristics		IEC NFC DIN	UL	CSA
Wire size (Screw clamp) mm ² / AWG	Solid	0.5 - 4 mm ²	22-10 AWG	24-12 AWG
	Stranded	0.5 - 4 mm ²		
Wire size (quick-connect) mm ² / AWG	Quick-connect	2,8 x 0,8 mm series 110 - 1,5 mm ² max. 6,3 x 0,8 mm series 250 - 2,5 mm ² max.		
Voltage	V	750 V Gr.C	600	300
Current	A	25	20	25
Rated wire size	mm ² / AWG	4 mm ²	10 AWG	12 AWG
Wire stripping length	mm / inches	9,5 mm / .374"		
Recommended torque	Nm / lb.in	0.4-0.6 Nm / 3.5-5.3 lb.in		

Selection

Description	Type	Order P/N	Packaging Weight kg
Terminal block with partition. Output : Screw clamp to horizontal			
quick connect tabs	grey <input type="checkbox"/> M 4/6.2G	1SNA 115 189 R1100	50
	blue <input type="checkbox"/> M 4/6.2G.N	1SNA 125 189 R1300	50
	beige V0 <input type="checkbox"/> M 4/6.2G.V0	1SNA 195 189 R1200	50

Accessories

End stop	BAM	9,1 mm	1SNA 103 002 R2600	50	
End section	grey <input type="checkbox"/> FEM6G	2,5 mm	1SNA 113 027 R0700	20	
	blue <input type="checkbox"/> FEM6G	2,5 mm	1SNA 123 027 R0100	10	
	beige V0 <input type="checkbox"/> FEM6G	2,5 mm	1SNA 193 027 R0000	20	
Separator end section	grey <input type="checkbox"/> SCF6G	3 mm	1SNA 113 075 R1700	20	
Assembled jumper bar (with IP20 protection)	2 poles	BJMI6	32 A	1SNA 176 663 R0000	10
	3 poles	BJMI6	32 A	1SNA 176 664 R0100	10
	4 poles	BJMI6	32 A	1SNA 176 665 R0200	10
	5 poles	BJMI6	32 A	1SNA 176 666 R0300	10
	10 poles	BJMI6	32 A	1SNA 176 667 R0400	10
Shield connector	CBM5	0,5 mm	1SNA 178 745 R1400	50	
	CBM8	0,8 mm	1SNA 178 746 R1500	50	

M 4/6.3G - 4 mm² blocks - 6 mm .236" spacing

Characteristics		NFC DIN	UL	CSA
Wire size (Screw clamp) mm ² / AWG	Solid	0.2 - 4 mm ²		20-12 AWG
	Stranded	0.22 - 4 mm ²		
Wire size (quick-connect) mm ² / AWG	Quick-connect	2,8 x 0,8 mm series 110 - 1,5 mm ² max. 6,3 x 0,8 mm series 250 - 2,5 mm ² max.		
Voltage	V	500 V Gr.C		300
Current	A	25		25
Rated wire size	mm ² / AWG	4 mm ²		12 AWG
Wire stripping length	mm / inches	9,5 mm / .374"		
Recommended torque	Nm / lb.in	0.5-0.8 Nm / 4.4-7.1 lb.in		

Selection

Description	Type	Order P/N	Packaging Weight kg
Terminal block with partition. Output : Screw clamp - vertical			
quick-connect tabs to vertical	grey <input type="checkbox"/> M 4/6.3G	1SNA 115 279 R0200	50


Accessories

End stop	BAM	9,1 mm	1SNA 103 002 R2600	50	
End section	grey <input type="checkbox"/> FEMG	1,5 mm	1SNA 114 144 R1200	25	
Assembled jumper bar (with IP20 protection)	2 poles	BJMI6	32 A	1SNA 176 663 R0000	10
	3 poles	BJMI6	32 A	1SNA 176 664 R0100	10
	4 poles	BJMI6	32 A	1SNA 176 665 R0200	10
	5 poles	BJMI6	32 A	1SNA 176 666 R0300	10
	10 poles	BJMI6	32 A	1SNA 176 667 R0400	10


Quick-connect Terminal blocks

Quick-connect to quick-connect  DIN 1-3

M 2,5/6.2G.2G - 2,5 mm² blocks - 6 mm .236" spacing



M 2,5/6.2G.2G

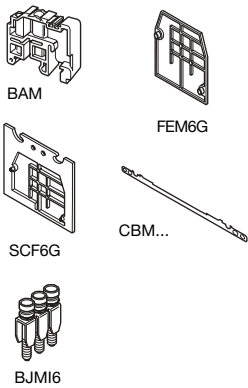

Characteristics

		IEC NFC DIN	UL	CSA
Wire size mm ² / AWG	Quick-connect	2,8 x 0,8 mm series 110 - 1,5 mm ² max. 6,3 x 0,8 mm series 250 - 2,5 mm ² max.		
Voltage	V	630	600	300
Current	A	20	25	20
Rated wire size	mm ² / AWG	2.5 mm ²	10 AWG	12 AWG


Selection

Description	Type	Order P/N	Packaging Weight kg	
Standard block, outputs : horizontal quick-connect tabs to horizontal quick-connect tabs	grey <input type="checkbox"/>	M 2,5/6.2G.2G	1SNA 115 191 R0300	50
	beige V0 <input type="checkbox"/>	M 2,5/6.2G.2G.V0	1SNA 195 191 R0400	50


Accessories

End stop		BAM 9,1 mm	1SNA 103 002 R2600	50
End section	grey <input type="checkbox"/>	FEM6G 2,5 mm	1SNA 113 027 R0700	20
	beige V0 <input type="checkbox"/>	FEM6G 2,5 mm	1SNA 193 027 R0000	20
Separator end section	grey <input type="checkbox"/>	SCF6G 3 mm	1SNA 113 075 R1700	20
	grey V0 <input type="checkbox"/>	SCF6G 3 mm	1SNA 193 075 R1000	20
Assembled jumper bar (with IP20 protection)	2 poles	BJMI6 32 A	1SNA 176 663 R0000	10
	3 poles	BJMI6 32 A	1SNA 176 664 R0100	10
	4 poles	BJMI6 32 A	1SNA 176 665 R0200	10
	5 poles	BJMI6 32 A	1SNA 176 666 R0300	10
	10 poles	BJMI6 32 A	1SNA 176 667 R0400	10
Shield connector		CBM5 0,5 mm	1SNA 178 745 R1400	50
		CBM8 0,8 mm	1SNA 178 746 R1500	50

M 2,5/6.4G.1 - 2,5 mm² blocks - 6 mm .236" spacing



M 2,5/6.4G.1



Characteristics

		IEC NFC DIN	UL	CSA
Wire size mm ² / AWG	Quick-connect	2,8 x 0,8 mm series 110 - 1,5 mm ² max. 6,3 x 0,8 mm series 250 - 2,5 mm ² max.		
Voltage	V	630	600	300
Current	A	35	25	25
Rated wire size	mm ² / AWG	2.5 mm ²	10 AWG	12 AWG

Selection

Description	Type	Order P/N	Packaging Weight kg	
Terminal block with partition. Output : vertical quick-connect tabs to vertical quick-connect tabs	grey <input type="checkbox"/>	M 2,5/6.4G.1	1SNA 115 280 R2000	50

Accessories

End stop		BAM 9,1 mm	1SNA 103 002 R2600	50
End section	grey <input type="checkbox"/>	FEMG 1,5 mm	1SNA 114 144 R1200	25
Assembled jumper bar (with IP20 protection)	2 poles	BJMI6 32 A	1SNA 176 663 R0000	10
	3 poles	BJMI6 32 A	1SNA 176 664 R0100	10
	4 poles	BJMI6 32 A	1SNA 176 665 R0200	10
	5 poles	BJMI6 32 A	1SNA 176 666 R0300	10
	10 poles	BJMI6 32 A	1SNA 176 667 R0400	10