

# CONNECTION TECHNOLOGY SELECTION GUIDE

## SIEMENS PLC S7 300

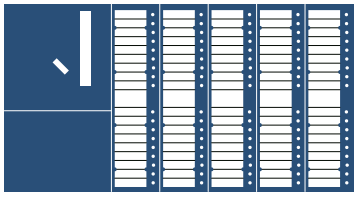


To order UL and CSA certified Interfast cables, see the column titled “Reference with UL cables” on the following pages.
UL and CSA cable part numbers are identical.

## interfast 2
Swing arm pre-wired by ENTRELEC

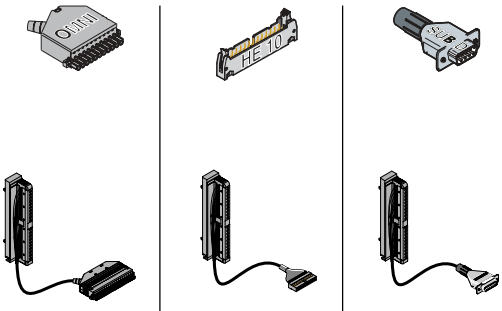

## interfast 3
PLC used has a connector on the card

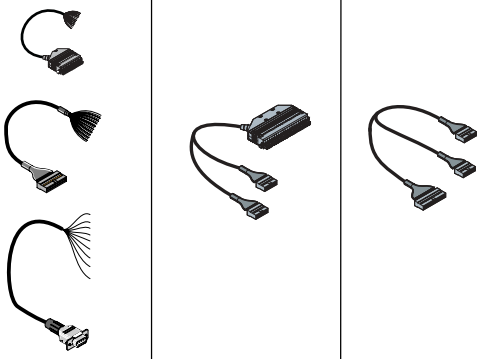

## Characteristics

| | | | | Multipurpose cable | Cable | Cable |
|---|---|---|---|---|---|---|
| Maximum current per point | 2 A | 1 A | 1 A | See section on Cables | See section on Cables | See section on Cables |
| Maximum voltage | 250 V | 60 V | 60 V | | | |
| Conductor size | 0,34 mm² | 0,34 mm² | 0,34 mm² | | | |
| | 22 AWG | 22 AWG | 22 AWG | | | |

## References

| | Page | | Page | | | |
|---|---|---|---|---|---|---|
| **Boards 8 I ANA** | | | | | | |
| 6ES7331-7KF01-0AB0 | 950 | | 954 | | | |
| 6ES7331-7NF00-0AB0 | 949 | | 953 | | | |
| **Boards 8 O ANA** (Ex) | | | | | | |
| 6ES7331-7SF00-0AB0 | 948 | | | | | |
| **Boards 4 I / 2 O ANA** | | | | | | |
| 6ES7334-0CE00-0AA0 | | | 954 | | | |
| 6ES7334-0CE00-0AB0 | 950 | | | | | |
| 6ES7334-0KE00-0AB0 | 950 | | 954 | | | |
| **Boards 4 I / 1 O ANA** | | | | | | |
| CPU 314 IFM | 950 | | 954 | | | |
| **Boards 4 I ANA** (Ex) | | | | | | |
| 6ES7331-7RD00-0AB0 | 948 | | | | | |
| **Boards 4 O ANA** | | | | | | |
| 6ES7332-5HD00-0AB0 | 950 | | 954 | | | |
| 6ES7332-7ND00-0AB0 | 950 | | 954 | | | |
| **Boards 4 O ANA** (Ex) | | | | | | |
| 6ES7332-5RD00-0AB0 | 948 | | | | | |
| **Boards 2 I ANA** | | | | | | |
| 6ES7331-7KB01-0AB0 | 950 | | 954 | | | |
| 6ES7331-7KB81-0AB0 | 950 | | 954 | | | |
| **Boards 2 O ANA** | | | | | | |
| 6ES7332-5HB01-0AB0 | 950 | | 954 | | | |
| 6ES7332-5HB81-0AB0 | 950 | | 954 | | | |